

Technical Data Sheet

PRODUCT

High-performance acoustic floor panel.
Comprising an 18mm tongued and grooved P5 chipboard to a 10mm foam resilient layer. Overlay 28 provides excellent impact and air-borne sound insulation in a single product. It is used on an existing floor, new ply or chipboard floor or directly to concrete/screed floors making it an ideal product for refurbishments and new build projects.


New build

Apartments, hotels, student accommodation and houses with timber joist boarded floors (Pre-Completion Testing).

Refurbishment

Where height restrictions exist but reliable performance is still required.

FEATURES	BENEFITS
28mm thickness	Minimises increase in overall floor height
Apply direct to existing sub-floor	No need for specialist installation

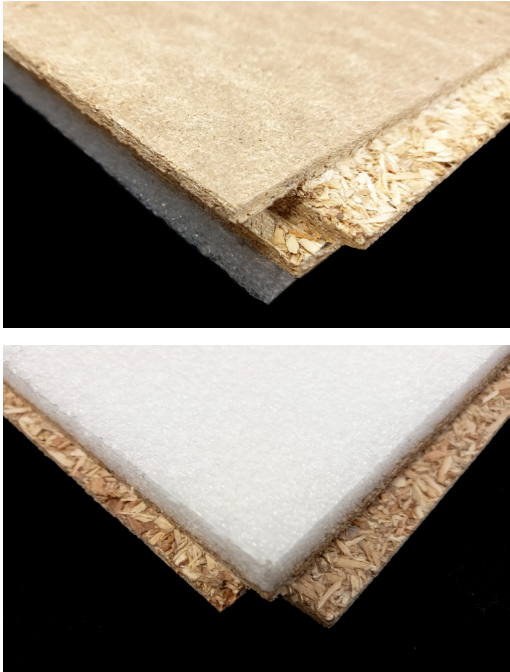

TECHNICAL INFORMATION

Acoustic	ΔL_w 18dB (BS EN ISO 140-6:1998)
Dimensions	2400mm x 600mm x 28mm
Weight	14kg/m ²
Part E	Has demonstrated compliance with Approved Document E (England & Wales)
Robust Detail	FFT5 compliant for E-FC-1, E-FC-2 and E-FS-1

