

PRODUCT DATA SHEET

REGUPOL EVERROLL MULTITILE ESSENTIAL/CLASSIC

Product Description

tile product, with prefabricated **REGUPOL everroll essential and classic** top layer made of PUR bonded SBR granulates with 10% and 20% EPDM colour content respectively

Areas of Application

- Spin Studios
- Cardio
- Functional training
- Free weight training
- Lifting Platforms

Features

- Protects the subfloor
- Quickly installed
- Non-slip
- Sustainable
- Durable

Thicknesses

- 27mm
- 30mm
- 40mm
- 43mm

Standard Dimensions

1000mm x 500mm

Weight

27mm = approx. 26kg/m²
 30mm = approx. 26,84kg/m²
 40mm = approx. 36,88kg/m²
 43 mm = approx. 42kg/m²

Slip Resistance

R 10 based on DIN 51130 (02.2014) and ASR A1.5/1,2



Impact Resistance

> 21Nm based on EN 14904 / EN 1517

Certification

Cradle to Cradle Certified® is a registered trademark of the Cradle to Cradle Products Innovation Institute.

REGUPOL everroll multitile classic is Cradle to Cradle Certified® at the Bronze level. (27mm/43mm)

Force Reduction

up to 44% based on EN 14904 / EN 14808

Fire Classification

E_{fl} based on EN 13501-1:2010-01 / EN9239-1:2010-11

Colours

three standard colours, individual colours available on request

Further technical data is available on request.

PRODUCT DATA SHEET

REGUPOL EVERROLL MULTITILE ESSENTIAL/CLASSIC

REGUPOL everroll multitile classic

EDITION 4.0




Berlin [3030]

Mons [3256]

Goa [3033]

Edition 4.0 = brilliant colours and nonreflecting surface

REGUPOL everroll multitile essential

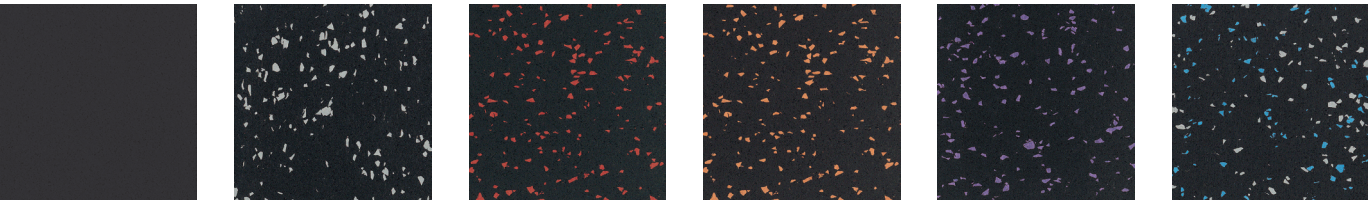

Glasgow


Berlin [3195]

Goa [3033]

Amsterdam [3185]

Bilbao [3159]

Helsinki [3196]

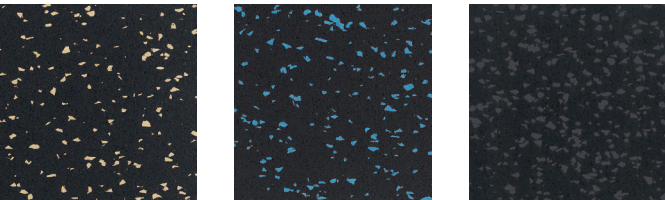

Kush [3150]

Palau [3195]

Mons [3256]

Deviations from the colours shown are possible due to production batches and brochure print.

*Wherever direct, prolonged or repeated skin contact can be expected, the requirements for a Consumer Product currently valid within the EU must be met. Where this is not expected, your choice can be made from the entire decor portfolio. Those products the manufacturer has identified as fulfilling the requirements of a Consumer Product, are explicitly marked as such. To aid your choice the manufacturers recommended everroll wear layer has been tabulated:

Application	everroll wear layer
CrossFit, Functional Training	Ultimate
Cardio, Free-weights, Lifting Platforms, Functional Areas, Spin Studios	Essential, Classic or Ultimate
Changing Rooms, Martial Arts Studios, Physiotherapy, Rooms, Yoga Studios	Not Recommended

We reserve the right to make changes to the technical data. The test results and specified values are subject to a tolerance of +/- 10 %. Crucial for the up-to-date data is the information on our homepage www.regupol.com.

IMPORTANT: The information provided within this document is believed correct and to the best of our available knowledge at its revision date and is provided as suggestion for safe handling, storage, transportation, use and disposal. The information should not be considered obligation in respect of warranty of (technical) performance, quality (specification) or suitability for any application or design. The customer must satisfy themselves the product (or draft specification) are relevant and suitable for their need and design intent. Prospective users should test a sample of product under their own conditions to satisfy themselves of its suitability for intended purpose and that expert advice be sought where different applications are contemplated. Due to our policy of continuous improvement we reserve the right to alter or amend published specification or design without prior notice. Reproduction of any part of this publication in any manner is not permitted without our prior written consent.

PRODUCT DATA SHEET

REGUPOL EVERROLL MULTITILE ULTIMATE**Product**

tile product, with prefabricated **REGUPOL everroll ultimate** top layer made of PUR bonded EPDM granulates

Areas of Application

- Spin Studios
- Cardio
- Functional training
- Free weight training
- Lifting Platforms
- Crossfit

Consumer Product

yes

Features

- Protects the subfloor
- Quickly installed
- Non-slip
- Sustainable
- Durable

Thicknesses

- 27mm
- 30mm
- 40mm
- 43mm

Standard Dimensions

1000mm x 500mm

Weight

27mm = approx. 26kg/m²

30mm = approx. 26,84kg/m²

40mm = approx. 36,88kg/m²

43 mm = approx. 42kg/m²

Slip Resistance

R 10 based on DIN 51130 (02.2014) and ASR A1.5/1,2

**Impact Resistance**

> 21Nm based on EN 14904 / EN 1517

Certificate of sustainability

Cradle to Cradle Certified® is a registered trademark of the Cradle to Cradle Products Innovation Institute.

REGUPOL everroll multitile ultimate is Cradle to Cradle Certified® at the Bronze level. (27mm/43mm)

Force Reduction

up to 44% based on EN 14904 / EN 14808

Fire classification REGUPOL everroll multitile ultimate

C_{fl} -s1 based on EN 13501-1:2010-01 / EN9239-1:2010-11

Colours

two standard colours, individual colours available on request


Further technical data is available on request.

PRODUCT DATA SHEET

REGUPOL EVERROLL MULTITILE ULTIMATE

REGUPOL everroll multitile ultimate EDITION 4.0

REGUPOL everroll ultimate meets the currently valid EU requirements on a consumer product.*



Orleans [1372]



Ottawa [1369]

Edition 4.0 = brilliant colours and nonreflecting surface

Deviations from the colours shown are possible due to production batches and brochure print.

*Wherever direct, prolonged or repeated skin contact can be expected, the requirements for a Consumer Product currently valid within the EU must be met. Where this is not expected, your choice can be made from the entire decor portfolio. Those products the manufacturer has identified as fulfilling the requirements of a Consumer Product, are explicitly marked as such. To aid your choice the manufacturers recommended everroll wear layer has been tabulated:

Application	everroll wear layer
CrossFit, Functional Training	Ultimate
Cardio, Free-weights, Lifting Platforms, Functional Training, Spin Studios	Essential, Classic or Ultimate
Changing Rooms, Martial Arts Studios, Physiotherapy, Rooms, Yoga Studios	Not Recommended

We reserve the right to make changes to the technical data. The test results and specified values are subject to a tolerance of +/- 10 %. Crucial for the up-to-date data is the information on our homepage www.regupol.com.

IMPORTANT: The information provided within this document is believed correct and to the best of our available knowledge at its revision date and is provided as suggestion for safe handling, storage, transportation, use and disposal. The information should not be considered obligation in respect of warranty of (technical) performance, quality (specification) or suitability for any application or design. The customer must satisfy themselves the product (or draft specification) are relevant and suitable for their need and design intent. Prospective users should test a sample of product under their own conditions to satisfy themselves of its suitability for intended purpose and that expert advice be sought where different applications are contemplated. Due to our policy of continuous improvement we reserve the right to alter or amend published specification or design without prior notice. Reproduction of any part of this publication in any manner is not permitted without our prior written consent.